

Product Data Sheet

MetaShield 1000

McAllister Mills, Inc.

Revised: July 2012



MetaShield utilizes a flexible embossed aluminum foil laminated to a glass fiber paper and a high tack auto grade pressure sensitive adhesive on one side.

Applications Include;

Heat Shields for Appliances, Industrial Equipment, Automotive, Exhaust, Pollution Control, and many more...


Composite Service Temperature: 1000° F

Adhesive Maximum Temperature Limit: 250° F

Thermal Conductivity: TBD

Sheet Size: 47" x 48" inch (sold as 16sf sheets)

Thickness: 1/8" or 1/4" Standard

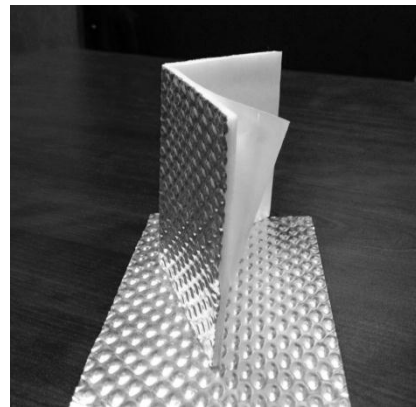

Product Details:

MS-3A-125G 1/8" Thick Sheet Size: 47" x 48" ~ 16sf/ sheet

MS-3A-250G 1/4" Thick Sheet Size: 47" x 48" ~ 16sf/ sheet